


WCI (932I) SERIES

Commercial Fan-Forced Large Wall Heater

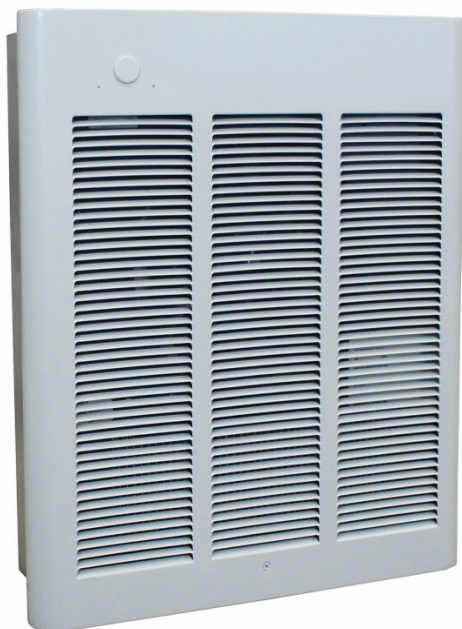

Technical Specifications:

- Temp Range: 40°–90°F
- CFM: 100
- Grille Gauge: 20

Applications:

- Mechanical Spaces
- Vestibules & Entrance Ways
- Lobbies, Hallways & Stairwells
- Restaurants
- Conference Rooms
- Medical Offices
- Basements
- Living/Family Room



White

Standard Construction Features:

- Contemporary design combined with commercial-grade steel grille to provide comfort through optimized airflow
- Fan-only operation for summer use
- Built-in power on/off switch for added safety during maintenance
- Manual reset thermal overheat protector disconnects power in the event of accidental blockage
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Integral double-pole thermostat allows for easy adjustment to maintain desired temperature
- All units have a permanently lubricated enclosed fan motor, which creates long life, low maintenance, and gently distributes warmth throughout the area

WCI (932I) SERIES

Commercial Fan-Forced Large Wall Heater

Models & Specifications:

ITEM INFORMATION		ELECTRICAL DATA				
CATALOG NO.	VOLTS	PHASE	WATTS	AMPS	BTU/HR.	SHIP WT.
932IW-3150-W	120	1	1500	12.5	5,118	25 lbs
932IW-3404-W*	240	1	4000/2000	16.7/8.3	13,649/6,824	25 lbs
	208	1	3000/1500	14.5/7.2	10,236/5,118	25 lbs
932IW-3407-W*	277	1	4000/2000	14.5/7.2	13,649/6,824	25 lbs
	240	1	3000/1500	12.5/6.3	10,236/5,118	25 lbs
932IW-3408-W*	208	1	4000/2000	19.2/9.6	13,649/6,824	25 lbs
932IW-3504-W	240	1	4800	20	16,378	25 lbs
	208	1	3600	17.3	12,284	25 lbs
932IW-3507-W	277	1	4800	17.3	16,378	25 lbs
	240	1	3600	15	12,284	25 lbs
932IW-35083-W	208	3	4800	13.4	16,378	25 lbs
932IW-3508-W	208	1	4800	23.1	16,378	25 lbs
932IW-3180-W	120	1	1800	15	6,142	25 lbs
932IW-3307-W*	277	1	3000/1500	10.8/5.4	10,236/5,118	25 lbs
932IW-34043-W	240	3	4000	9.7	13,649	25 lbs
932IW-34083-W	208	3	4000	11.1	13,649	25 lbs
932IW-35043-W	240	3	4800	11.6	16,378	25 lbs
932IW-3153-W	347	1	1500	4.3	5,118	25 lbs
932IW-3203-W	347	1	2000	5.8	6,824	25 lbs
932IW-3303-W	347	1	3000	8.6	10,236	25 lbs
932IW-3403-W	347	1	4000	11.5	13,649	25 lbs
932IW-3503-W	347	1	4800	13.8	16,378	25 lbs
932IW-3156-W	600	1	1500	2.5	5,118	25 lbs
932IW-3206-W	600	1	2000	3.3	6,824	25 lbs
932IW-3306-W	600	1	3000	5	10,236	25 lbs
932IW-3406-W	600	1	4000	6.7	13,649	25 lbs
932IW-3506-W	600	1	4800	8	16,378	25 lbs

*Factory-wired for higher wattage, field-convertible to half wattage. For wall mounting - Do not install back box closer than 8 in. from floor or adjacent wall. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed.

Optional Accessories:

CATALOG NO.	DESCRIPTION	SHIP WT.
WIC-FCTP-W	Tamper-Proof Front Cover, White	2 lbs
WIF-SMFL-W	Surface Mounting Frame, White	5 lbs
WIF-SMFL1-W	1 in. Semi-Recessed Frame, White	2 lbs
WIF-SMFL2-W	2 in. Semi-Recessed Frame, White	2 lbs
WIC-SFC-W	14-gauge Security Front Cover, White	6 lbs

Dimensions and Clearances:

